

**DAMTEC**<sup>®</sup>  
**ACOUSTIC UNDERLAY**  
PROVIDING YOU PEACE AND QUIET

**“DIRECT-STICK”**  
**TILED FLOORING APPLICATIONS ON CONCRETE SLAB OR SCREED**  
with Damtec<sup>®</sup> Multi Acoustic Underlay



Manufactured by


**K** **KRAIBURG**  
RELASTEC

made  
in  
Germany

Engineered solutions against impact sound








DAMTEC® Multi is a high grade and extremely resilient rubber composite acoustic underlay manufactured from recycled material to reduce the attenuation and impact sound issues.

This product is our Multi purpose underlay that can also be used for under screed and timber mass flooring applications.

## Product Data Sheet


Material :	Granules of recycled rubber with PU elastomer bonding agent
Colour :	Multicolour
Surface :	Granular texture
Width :	1000 mm $\pm$ 1.5%
Length :	Varies depending on thickness $\pm$ 1.5%
Available thickness :	2mm up to 5mm $\pm$ 0.7 mm
Density :	Approx. 970kg/m <sup>3</sup>
Tensile strength :	Approx. 0.4 N/mm <sup>2</sup> (ISO 1798)
Elongation at break :	Approx. 50% (ISO 1798)
Service temperature range :	-30° C to 80° C

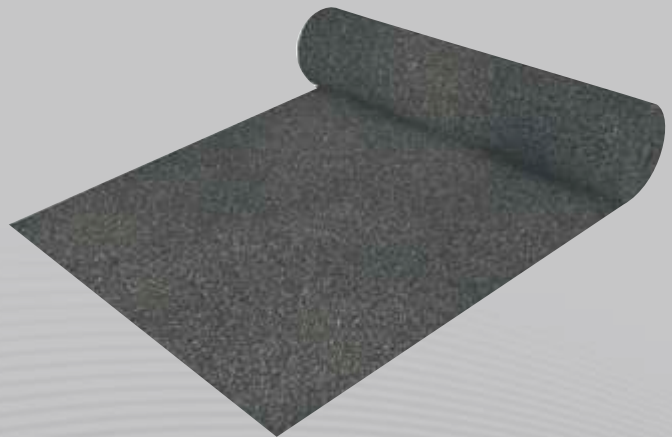

**\* Note: All testing conducted on ONLY 140mm thick concrete slab with NO CEILING and in accordance with ISO 140 with results calculated in accordance with ISO 717.2 (as per B.C.A. requirements.)**

Test report No:	Floor covering	Thickness (mm)	Complies with 2016 BCA
			$L_{nw} \leq 62$
<b>DAMTEC</b> ® Multi			
470243-16	Ceramic tiles - 8mm thick (Adhered)	4mm	✓

**DAMTEC**® "DIRECT-STICK" TILED FLOORING ON CONCRETE SLAB OR SCREED APPLICATIONS with **Damtec Multi** Acoustic Underlay

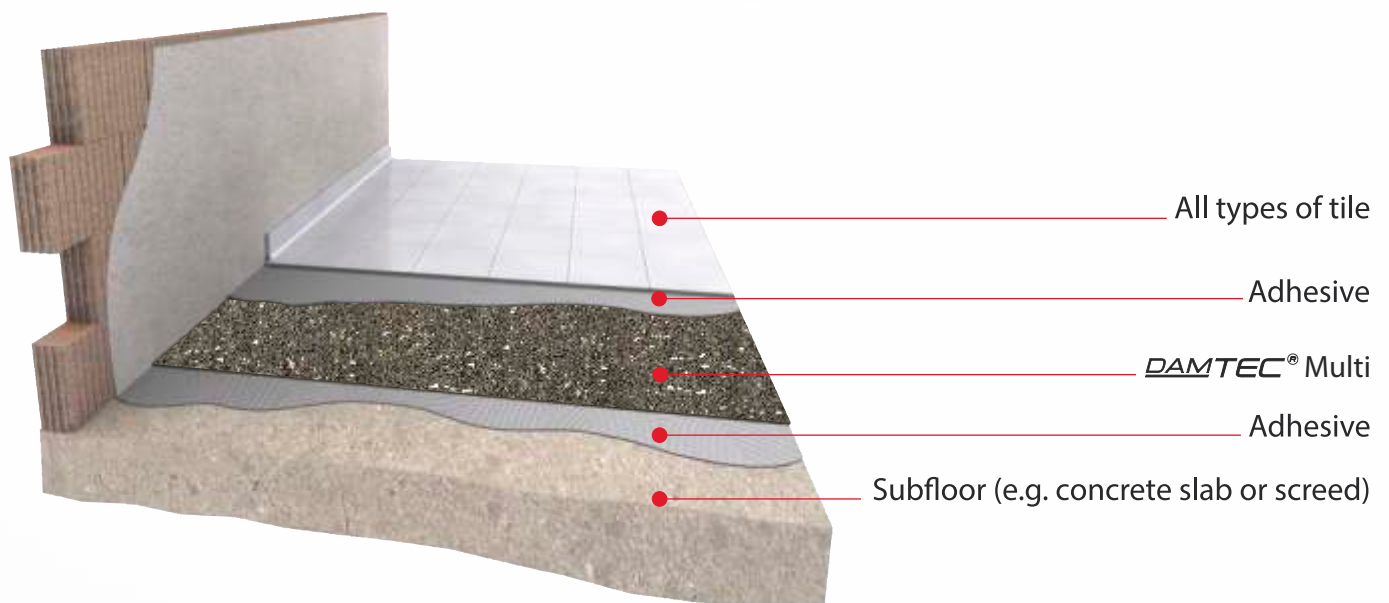

All types of tile

Adhesive

**DAMTEC**® Multi

Adhesive

Subfloor (e.g. concrete slab or screed)

**DAMTEC**® FEATURES AND BENEFITS

- By using the Damtec Multi range of acoustic underlay products, you will have minimum effect on floor heights and threshold points and provides significantly less risks of deflections and movement in the floor finish as opposed to thicker underlays, which may potentially lead to tile and/or grout cracking.
- All products tested are compliant to the Building Code of Australia (Part F5).
- All products are ECO friendly and certified (Including LEED certified).
- All products contain 100% recycled raw materials that can be recycled again.
- Minimises hollow clicking sounds and reverberations under hard floors.
- Fully warranted & compatible floor systems with leading adhesive manufacturers.
- Outstanding long-term, compressive strength and load bearing performance under high point loads.
- Superior resistance to moisture absorption and rot degradation.

**1. GENERAL INFORMATION**

The following instructions are recommendations based on our experience with installers and material suppliers.

Concrete and timber substrates should be straight, clean and dust free. (IE: a keyable finish.) Any laitance residue or curing compound on the substrate’s surface should be removed prior to the installation of the DAMTEC® acoustic underlays.

Observe other building materials' installation and data sheets such as, adhesives, waterproofing membranes, screed mixing ratios etc...etc...

It is strongly advised that upon completion of installation, no tradespersons are to walk over the acoustic underlay for a minimum of 24 hours. Please try and close doors behind you. In the event that this is not practical, please ensure that the underlay is covered with an appropriate cover.



**2. SUBSTRATE PREPARATION**

Check and prepare substrate in accordance with the relevant Australian Standards.

Concrete substrates are to be free of “hydrostatic pressure.”

All substrates must conform to the national sub base regulations.

They must be level, clean, firm, stable bearing, dry, free of cracks and free of substances which reduce adhesion (e.g. oil, dust, abrasion debris, old paint etc.)

All concrete substrates are to possess a moisture content reading of less than 5%.

If required, an appropriate primer or moisture barrier membrane is to be installed prior to the installation of the DAMTEC® acoustic underlay products.

Check the adhesive manufacturer’s usage instructions for possible special procedures which might need to be adhered to regarding levelling compounds or primers.

For timber substrate applications, ensure that the floor is completely fixed. Any previous stains, sealers or polish is to be removed.





### 3. STORAGE / PREPARATION

The DAMTEC® acoustic underlay rolls should be stored horizontally and in dry areas at constant temperature.

Roll out, loose lay and butt join the underlay ensuring that it is slightly larger than the surface to be covered. Loose lay the underlay perpendicular to the subsequent installation direction of the floor finish.

Leave the underlay in place for a minimum of 12 hours.

This initial process is vital, as it allows for dimensional relaxation and temperature equilibration to the rooms characteristics.

At the edges, near vertical components like walls, ensure you have at least 50mm extra material running up the walls to allow for a tight cut in after the relaxation period.

### 4. INSTALLATION - Adhering DAMTEC® acoustic underlay to substrate.


Once the relaxation period has ended and prior to adhering, cut all excess acoustic underlay to the exact dimensions of the surface to be covered with a straight-edge and sharp stanley knife.

Pull back the DAMTEC® acoustic underlay to about halfway and observing the adhesive manufacturers' data and installation sheets, trowel adhesive (2.4mm V-Notch trowel recommended) onto the substrate. Pick up the underlay and very carefully lay the DAMTEC® acoustic underlay into the adhesive whilst still wet.

Move to the opposite side and carry out the same process. Once the first strip is complete, move onto the next, adjacent strip ensuring and checking that each strip is tightly butt-joined with no overlaps and NO GAPS.

It is advised that you begin the bonding of the DAMTEC® acoustic underlay from the furthest point of the room and work back towards the entry, hence minimising the need to step on the installation once completed.

Allow appropriate time for temperature equilibration of adhesive and floor finish materials as specified by the respective manufacturers' instructions.




**5. INSTALLATION OF FLOOR FINISH**

The nominated floor finish is to be installed on top of the cured DAMTEC® acoustic underlay in accordance with the relevant floor and adhesive manufacturers' specifications. We strongly recommend that for hard floor finishes like tiles and timbers, allow at minimum, a 5mm rebate from the adjacent structural walls to minimise flanking noise transmission.

**NOTES:**


- 1) Refer to DAMTEC® Cross-sectional drawings for additional information with respect to your particular application.
- 2) If the event that the DAMTEC® Multi in 4mm thickness or greater is being proposed for "Direct Stick" tile applications, it is recommended that you conduct a practical and structural installation test prior to its use for suitability with the proposed floor finish.

**DISCLAIMER:** The general information provided is based on commonly accepted installation practises for acoustic underlay flooring products. The information is not intended to constitute expert advice. To suit your specific site conditions, it is recommended to seek further advise on your application with technical staff prior to use. Damtec® Australasia shall not be liable for incidental and/or consequential damages directly or indirectly sustained, nor any loss caused by not complying with relevant industry/product standards and improper use of any Damtec® products. Due to varying construction methods, any other circumstances not stated above should be brought to the attention of Damtec® Australasia for review. For suitability to the prevailing site conditions, it is advised that you consult with a certified and industry accredited acoustic consultant and conduct on-site testing for verification of performance as results may vary.




••• Gummiwerk KRAIBURG RELASTEC GmbH · Fuchsberger Straße 4 · D-29410 Salzwedel  
 Fon +49-(0)8683-701-142 · Fax +49-(0)8683-701-4142 · christina.wallner@kraiburg-relastec.com · www.kraiburg-relastec.com/damtec/  
 Sitz der Gesellschaft Salzwedel · Handelsregister Stendal HRB 525 · Geschäftsführer Georg Stockhammer

**DAMTEC®** TYPICAL APPLICATION FOR TILED (DRY AREA) "DIRECT-STICK"  
OVER **Damtec Multi** ACOUSTIC UNDERLAY

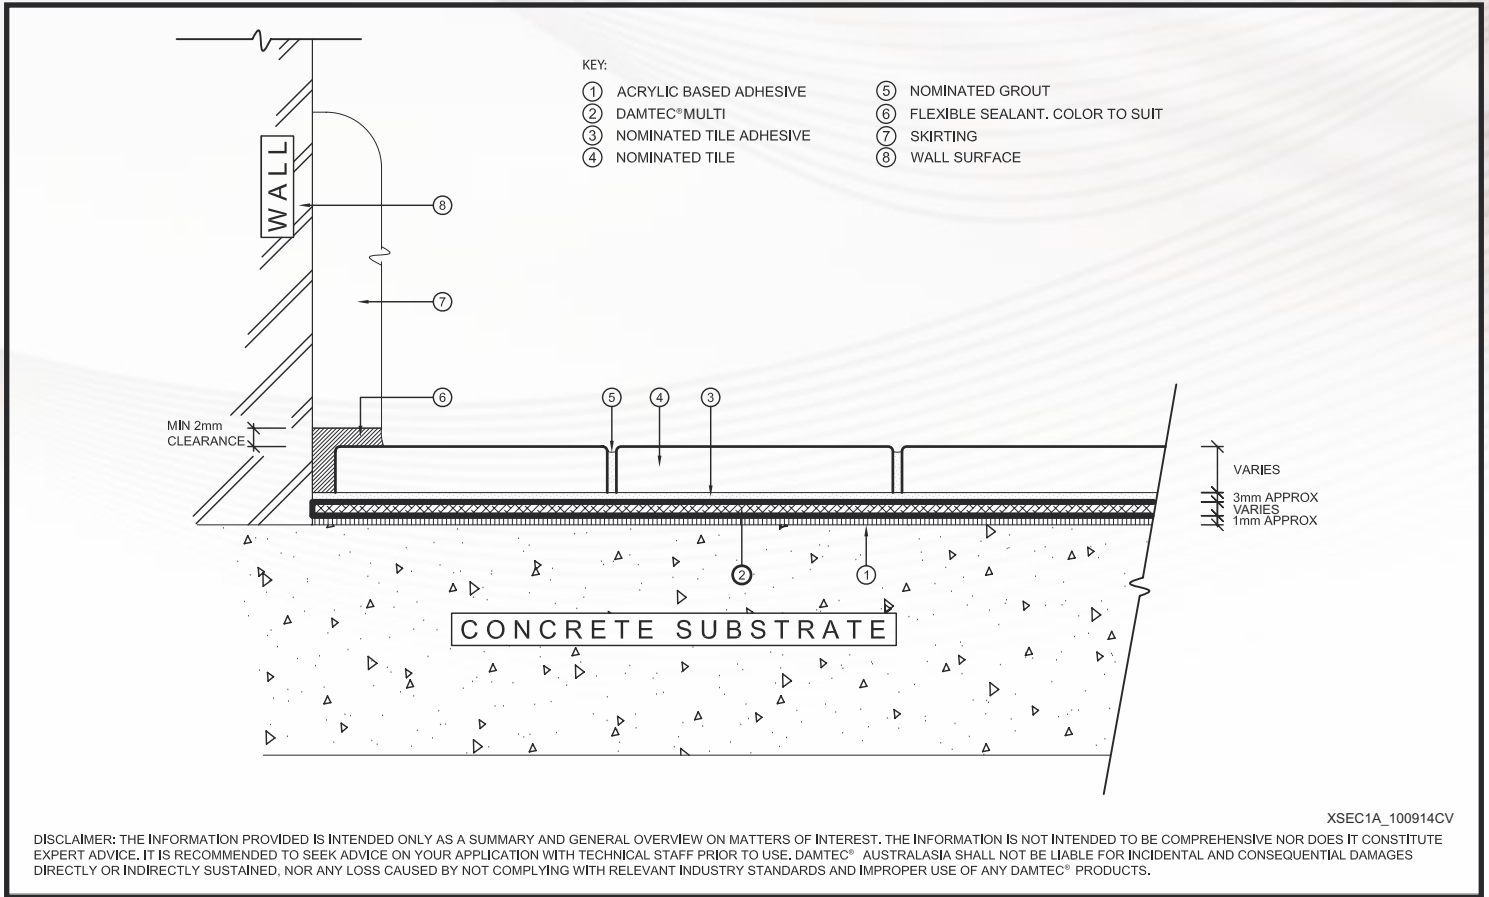


**DAMTEC®** TYPICAL APPLICATION FOR TILED (WET AREA) "DIRECT STICK"  
OVER **Damtec Multi** ACOUSTIC UNDERLAY

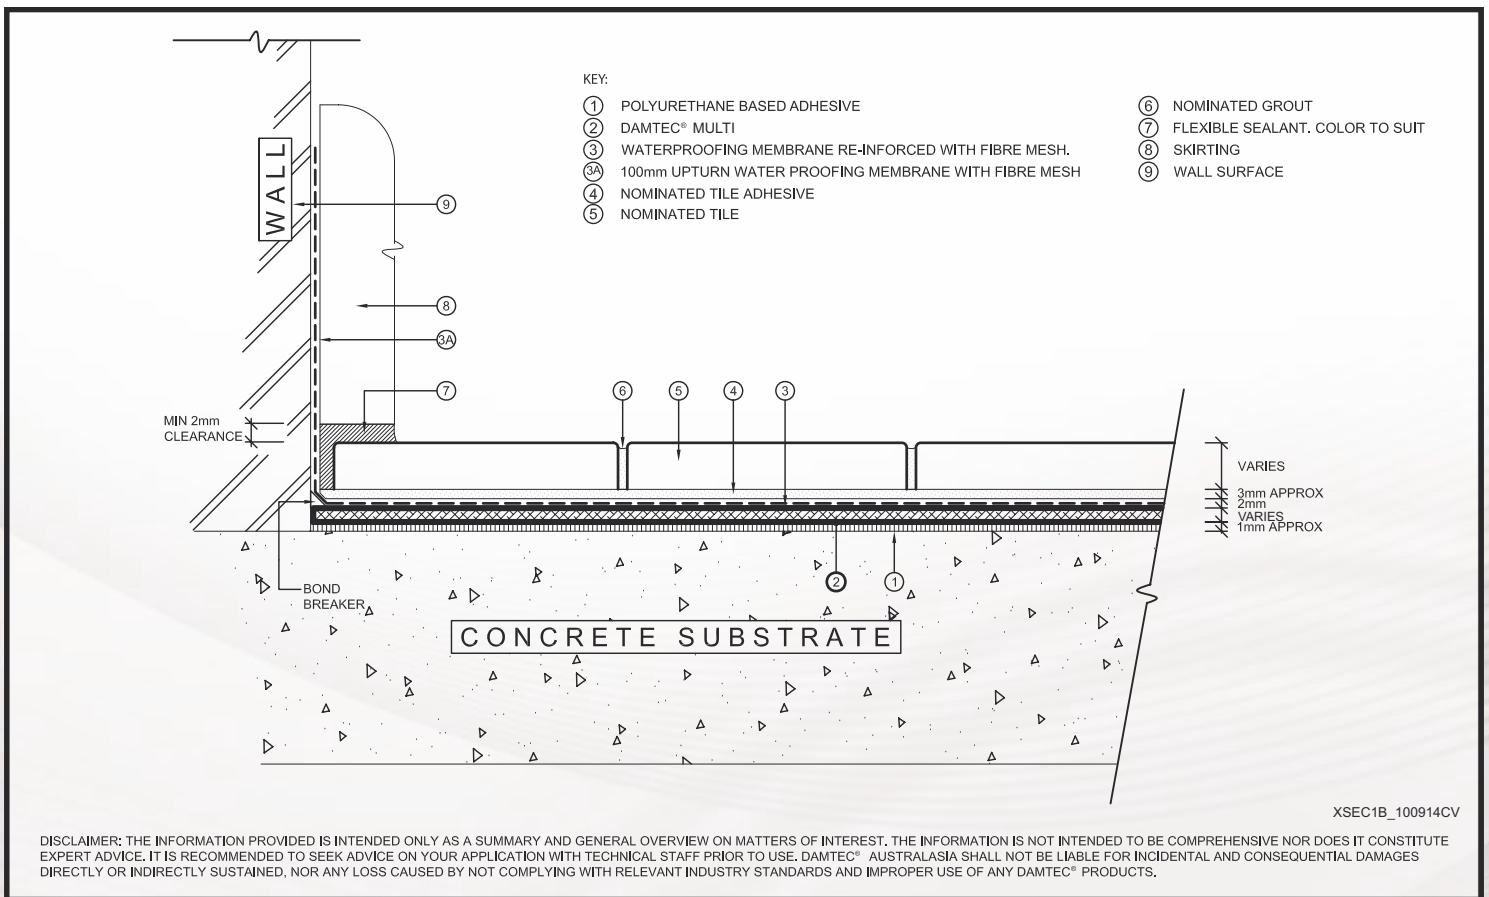




**DAMTEC**® TYPICAL APPLICATION FOR TILED (DRY AREA) OVER A SCREED LESS THAN 35mm THICK AT WASTE OVER **Damtec Multi** ACOUSTIC UNDERLAY

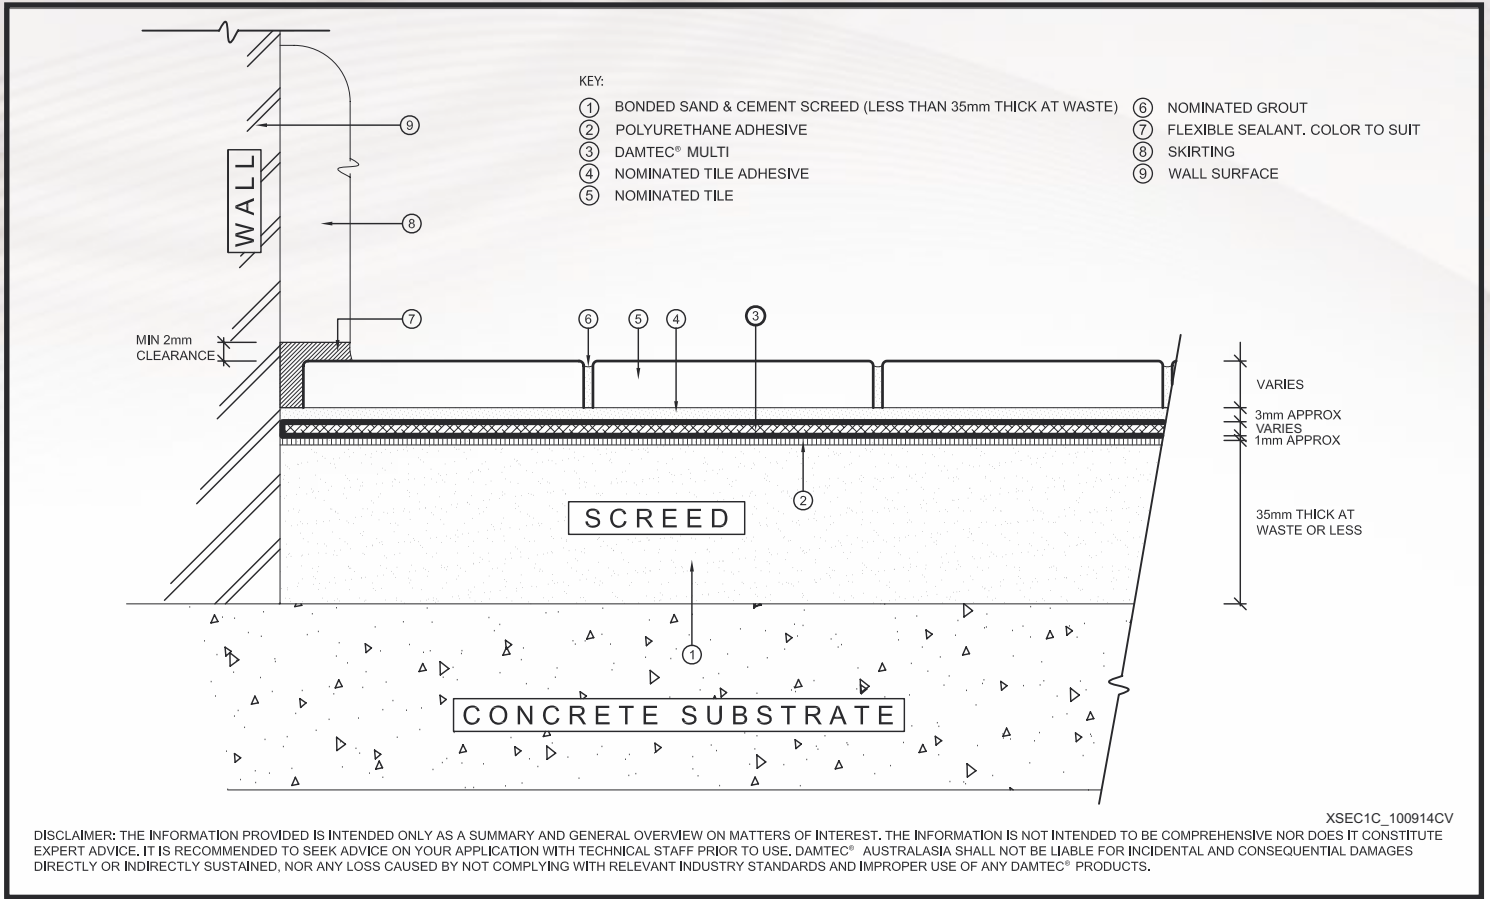

**DAMTEC**® TYPICAL APPLICATION FOR TILED (WET AREA) OVER A SCREED LESS THAN 35mm THICK AT WASTE OVER **Damtec Multi** ACOUSTIC UNDERLAY

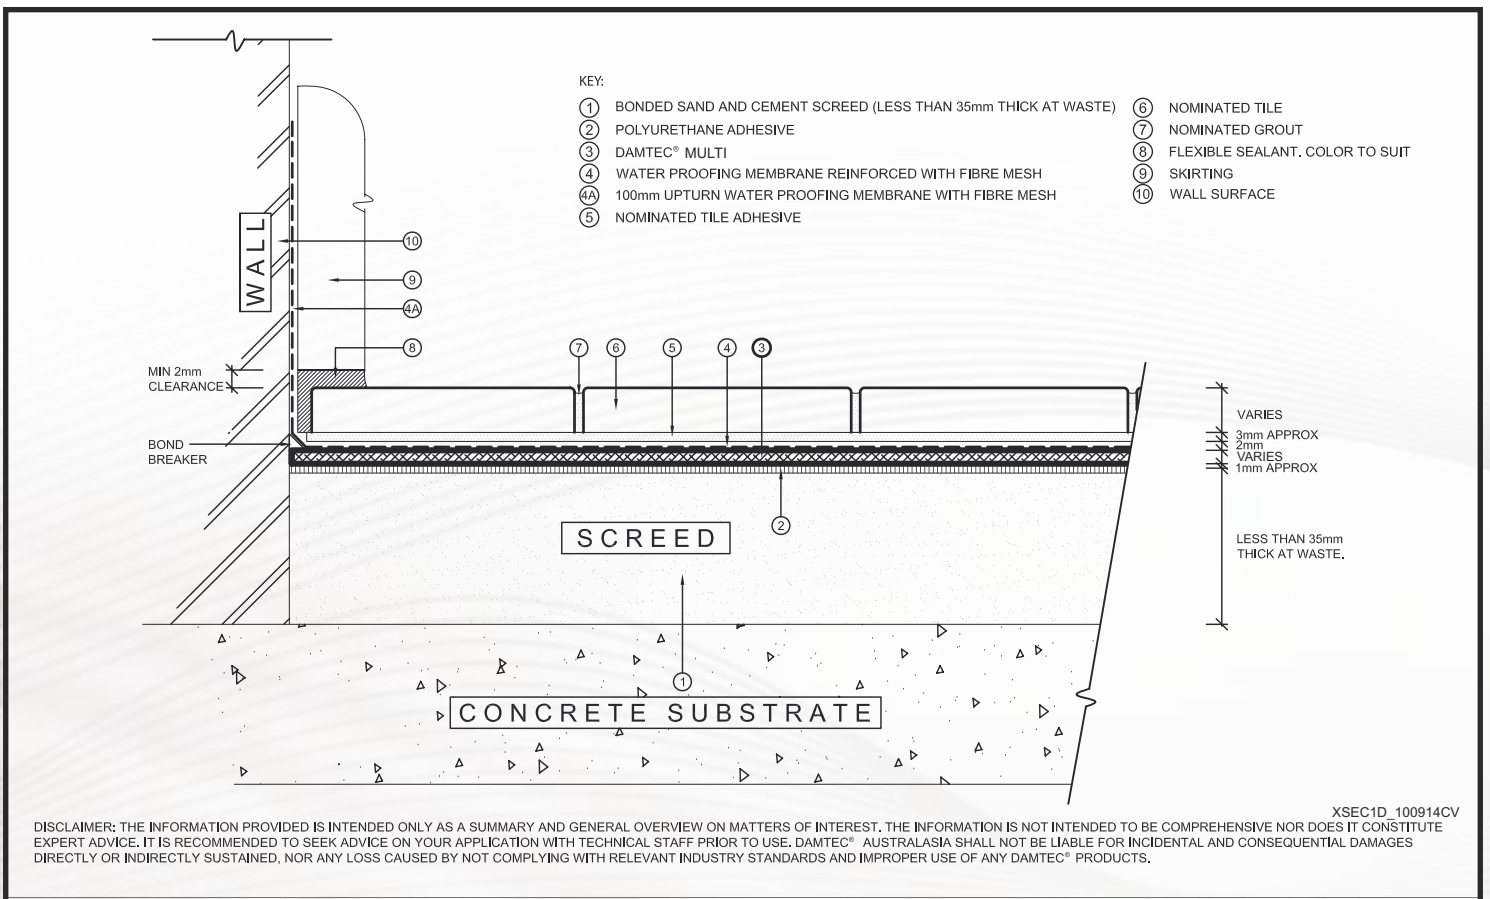

## 1. Identification of the substance/preparation

### 1.1. Name of product:

DAMTEC products

### 1.2. Manufacturer/distributor

Gummiwerk Kraiburg Relastec GmbH  
Fuchsberger Straße 4  
D -29410 Salzwedel

### 1.3. Advice

Telefon +49 (0) 3901 8304-0  
Fax +49 (0) 3901 423557

## 2. Composition/information on ingredients

### 2.1. Chemical characterization

High specified rubber granules bound on recycling basis, partial with supplements, like cork granules or PU foam with PU elastomer.

### 2.2. Additional advice

Application: floor sound underlay

## 3. Special hazards information for man and environment

Not classified as dangerous preparation according to Directive 1999/45/EC.

## 4. First aid measures

### 4.1. In case of eye contact

In case of contact with eyes rinse with plenty of water carefully. In the event of persistent symptoms seek medical treatment.

### 4.2. In case of ingestion Consult doctor if feeling unwell.

## 5. Firefighting measures

### 5.1. Suitable extinguishing material

Foam  
Dry fire-extinguishing substances  
ABC powder  
Water spray jet

### 5.2. Special exposure hazards arising from the substances, combustible products or resulting gases

Fire gas organic materials has to be classed invariably as respiration poison.

### 5.3. Special protective equipment for firefighters

Use breathing apparatus with independent air supply. Firefighting operations, rescue and clearing work under effect of combustion and smoulder gases just may be done with breathing apparatus.

### 5.4. Additional information

Burns down under strong soot production.  
Breathing apparatus  
Fire residues and contaminated firefighting water be disposed of in accordance with the local regulations.

## 6. Accidental release measures

### 6.1. Personal precautions

No special measures necessarily.

### 6.2. Methods for cleaning up/taking up

Take up mechanically and send for disposal.

## 7. Handling and storage

### 7.1. Advice on safe handling

No special measures necessary if used correctly.

### 7.2. Advice on protection against fire and explosion

Pay attention to general rules of internal fire prevention.

## 8. Exposure controls / personal protection

### 8.1. Skin protection

Working protection clothes

### 8.2. General protective measures

Avoid contact with the eyes.

### 8.3. Hygiene measures

Wash hands before breaks and after work.

## 9. Physical and chemical properties

### 9.1. Form: solid

### 9.2. Colour: various, depending on coloration

### 9.3. Odour: characteristic

### 9.4. pH value in delivery state: not applicable

### 9.5. Flash point: not applicable

### 9.6. Solubility in water: insoluble

## 10. Stability and reactivity

### 10.1. Thermal decomposition

No decomposition if suitable use.

## 11. Toxicological information

Experience made from practice: According to our experience and available information the product has no health-damaging effect when handled appropriately and used under the conditions foreseen by the manufacturer.

## 12. Ecological information

### 12.1. General regulation

Appropriate handling and use impede ecological problems.

## 13. Disposal considerations

### 13.1. Recommendations for the product

There are no harmonised regulations on the disposal of chemicals in the member states of the EU. In Germany, the Recycling and Waste Management Act 8 (KrW - AbfG) stipulates recycling as a requirement.

This means that a distinction must be made between "waste for recycling" and "waste for disposal". Particular aspects - in the main concerning delivery - are also governed by the Laender.

### 13.2. Recommendations for packing

Totally emptied packaging may be taken for recycling.

## 14. Transport information

### 14.1. Transport/further informations

No hazardous materials as defined by the prescriptions.

## 15. Regulatory information

### 15.1. Remarks for classification

The product does not require a hazard warning label in accordance with EC directives/German regulations on dangerous substances.

## 16. Other information

The information contained herein is based on the state of our knowledge. It characterizes the product with regard to the appropriate safety precautions. It does not represent a guarantee of the properties of the product.





# **DAMTEC**<sup>®</sup>

## **ACOUSTIC UNDERLAY**

**PROVIDING YOU PEACE AND QUIET**

**Head Office (Vic):**

**Damtec Australasia Pty Ltd**


30 Chaffey Street

Thomastown Vic 3074

Tel: +61 3 9462 7000

Fax: +61 3 9462 4661

Email: [info@damtec.com.au](mailto:info@damtec.com.au)

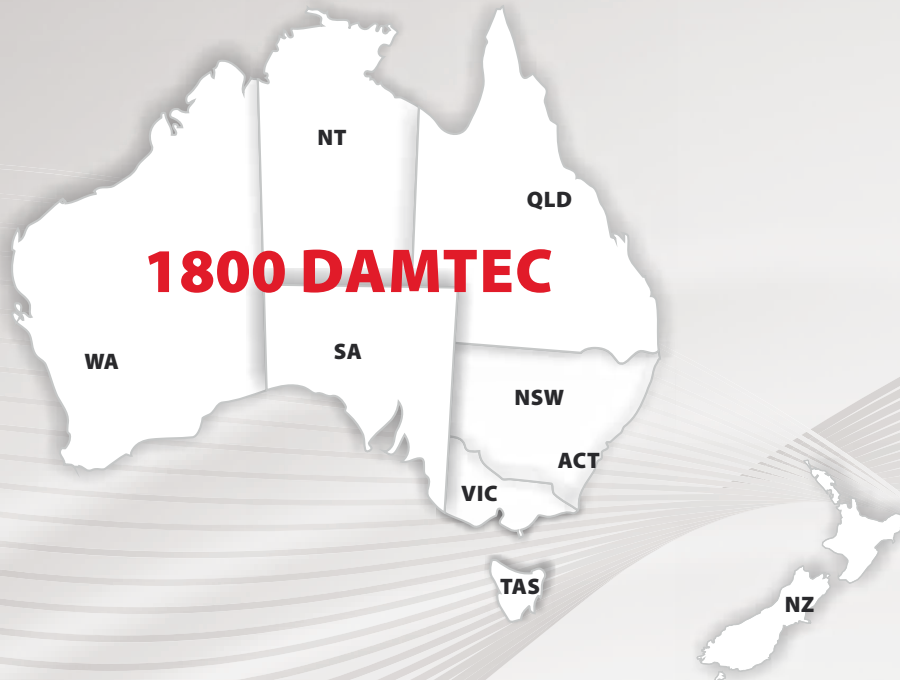

made  
in  
Germany



NOW A PROUD  
NATSPEC PARTNER

[www.damtec.com.au](http://www.damtec.com.au)